



## College Series Batten | 28-43W



### Features :

- Surface linear suitable for educational and commercial applications
- Constructed from polycarbonate & metal
- IP40 and IK08 protection, UGR<19 available
- Hinge open design
- 3CCT & Wattage selectable
- Detachable terminal block with multiple positions
- BESA box compatible
- Tool-less access to control gear
- Plug and Play Emergency and Microwave sensor pack available
- Low glare UGR<19 optional
- 4ft / 5ft / 6ft options
- 120/130/140/150/160lm/W available





| Package                  |                                  |            |                |
|--------------------------|----------------------------------|------------|----------------|
| Model                    | Product Dimension<br>Carton Size | PCS/Carton | Carton Size    |
| LED-SF-4 UGR/<br>120CCT1 | 1205x200x97mm                    | 2          | 1225x220x221mm |
| LED-SF-4 UGR/<br>120CCT2 | 1205x200x97mm                    | 2          | 1225x220x221mm |
| LED-SF-4 UGR/<br>120CCT3 | 1505x200x97mm                    | 2          | 1525x220x221mm |
| LED-SF-4 UGR/<br>120CCT4 | 1505x200x97mm                    | 2          | 1525x220x221mm |
| LED-SF-4 UGR/<br>120CCT5 | 1800x200x97mm                    | 2          | 1825x220x221mm |
| LED-SF-4 UGR/<br>120CCT6 | 1800x200x97mm                    | 2          | 1825x220x221mm |

| Parameter            |              |         |               |                 |
|----------------------|--------------|---------|---------------|-----------------|
| Model                | Power        | Lm/W    | Input Voltage | CCT             |
| LED-SF-4 UGR/120CCT1 | 28W          | 120/140 | 220-240V      | 3000/4000/5700K |
| LED-SF-4 UGR/120CCT2 | 20/24/28/32W | 130/150 | 220-240V      | 3000/4000/5700K |
| LED-SF-4 UGR/120CCT3 | 35W          | 120/140 | 220-240V      | 3000/4000/5700K |
| LED-SF-4 UGR/120CCT4 | 18/23/28/33W | 130/150 | 220-240V      | 3000/4000/5700K |
| LED-SF-4 UGR/120CCT5 | 43W          | 120/140 | 220-240V      | 3000/4000/5700K |
| LED-SF-4 UGR/120CCT6 | 22/28/34/40W | 130/150 | 220-240V      | 3000/4000/5700K |

| Material     |                              |
|--------------|------------------------------|
| Beam angle   | 120°                         |
| LED type     | SMD 2835                     |
| Material     | Steel Body/PC Cover          |
| Color option | White                        |
| Installation | Surface Mounted / Suspension |

| Parameter |         |
|-----------|---------|
| CRI       | >80/90  |
| PF        | >0.95   |
| IP        | 66      |
| IK        | 10      |
| Lifespan  | 50,000h |



The Lighting Practice

Lumexa Series

Engineered Illumination

## Specification

| Function        |                    |
|-----------------|--------------------|
| Microwave       |                    |
| Auto Dimmable   | 15-100%            |
| Sensor Distance | Height 3m (6m Max) |

## Accessories

Anchor




×2

ST4\*40mm Screw




×2

(Unit:mm)



## Plane Distribution Diagram

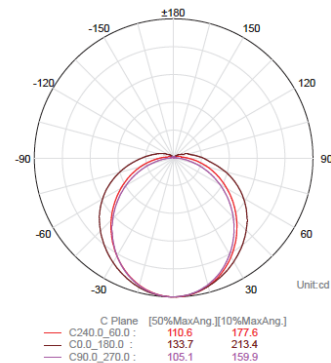

## Illuminance-Distance Curve

