



Linear Series
LED - XT4



Thoughtful Design




Cross shape connection

Thoughtful Design



T shape connection

Multiple Installation Methods



90° Corner Connection

Features :

- Constructed from aluminum with white or black powder coated
- Surface or suspended installation for education, commercial and retail applications
- Separate upward light accessory as required
- CCT & Wattage selected version available
- Low glare UGR<19 optional
- Up and down light
- 2ft/4ft/5ft options

			ROHS	220-240 50/60Hz		
IP 66	IK 10	PF >0.95	CRI >80/90		-20°C +45°C	



Specification

Parameter				
Model	Power	Lm/w	Input voltage	CCT
LED-XT4-60	18W	120	220-240V	3000/4000/5700K
LED-XT4-120	36W	120	220-240V	3000/4000/5700K
LED-XT4-150	45W	120	220-240V	3000/4000/5700K
LED-XT4-180	60W	120	220-240V	3000/4000/5700K

Material	
Beam angle	120°
LED type	SMD2835
Material	Aluminum Body/ PC Cover
Color option	White
Installation	Surface mounted/ Suspension



Parameter	
CRI	>80/90
PF	>0.95
IP	20
IK	6
Lifespan	5000h

Function	
Microwave	
Auto Dimmable	15%-100%
Sensor Distance	Height 3m (6m Max)

Package			
Model	Product Dimension	PCS/Carton	Carton Size
LED-XT4-60	600x60x73mm	6	620x170x212mm
LED-XT4-120	1200x60x73mm	6	1220x170x212mm
LED-XT4-150	1500x60x73mm	6	1520x170x212mm
LED-XT4-180	1800x60x73mm	6	1820x170x212mm



(Unit: mm)



Accessories :

Anchor



× 2

ST4*40mm Screw




× 2

Suspension Kit



× 2

C Plane Distribution Diagram

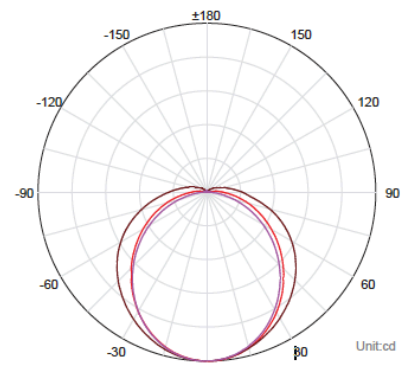

C Plane		[50%MaxAng.][10%MaxAng.]	
C240.0_60.0 :	110.6	177.6	
C0.0_180.0 :	133.7	213.4	
C90.0_270.0 :	105.1	159.9	

Illuminance-Distance Curve

